

A supremely versatile touch panel within a sleek compact design which improves speed and efficiency in all hospitality environments




Smart Touch  
**QT-6000**



Advanced networking, including a wireless networking option for easy installation, shared check tracking and shared printer functionality in a sturdy design with a small footprint.

## Smart Touch QT-6000

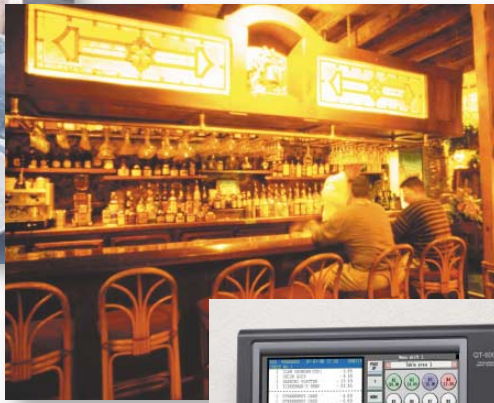

### Smart Touch

The large color LCD screen with a **touch screen** feature makes it easy to use for most types of stores especially in the hospitality market. **Various key sizes** are available to meet customer demand for ease of use. **The small foot print** makes it easy to install almost anywhere, **wall mounting** is also available. **Bitmap images** can be linked to the keys to identify functionality by image and assist the operator. The touch screen supports **color themes** that can be selected to fit the atmosphere of the store. The QT-6000 is equipped with standard features and functions such as shared check tracking and printer sharing typically used in restaurants, cafés and bars. Communications between terminals are made using **Ethernet**, which can be configured easily and accurately with the **automatic ID setting** function. An optional **high speed radio frequency wireless** communication function is available to offer solutions in cases where it is difficult to install wired Ethernet communications.



### Magnetic card reader

A **magnetic card reader** is available as an option for customer identification and future use.



### External thermal Printer

**UP-360 external thermal printer** can be used for the purpose of receipt, order receipt and sales report printing.



### External remote display

Transaction items displayed on the optional **external remote display** using a wide 3-color backlit LCD which can easily be read by the customer.

### Specifications

Display	12.1 inch color LCD screen with touch panel control
Environment	Operating temperature 0 to 40°C Operating humidity 20 to 85%RH
Dimensions (W x D x H)	343 x 288 x 311 (mm)
Weight	Approx. 5.3 kg (including stand)
Power consumption	AC120 - 240 ±10% / Max. 1.1A